

JK Products & Services, Inc

PLANET FITNESS 42/4




Power consumption rating	10,000 W
Rated frequency	60 Hz
Rated voltage	230 V
Rated breakers	40 amp 3-pole or 60 amp 2-pole
Rated amp draw 3 Ø	27
Rated amp draw 1 Ø	47
Mains Power Connection*	The unit is configured from the factory for connection to 3-Phase power. A 1" liquid-tight connector is provided See note for wiring
Noise level 1m away from device	68.1 dB
Noise level inside the device	<70dB
Load on the acrylic panel	max. 330 lb
Weight	approx. 1,190 lb
Operating temperature	59-89 °F
Unit footprint**	94 1/2" X 82 11/16"
Minimum Room Size	9' X 8'
Number of body lamps	Base 16 @ 180W 79"
	Canopy 26 @ 160W 71"
Number of facial lamps	4 @ 520W
Spaghetti lamps	3 @ 8W



*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

JK Products & Services, Inc

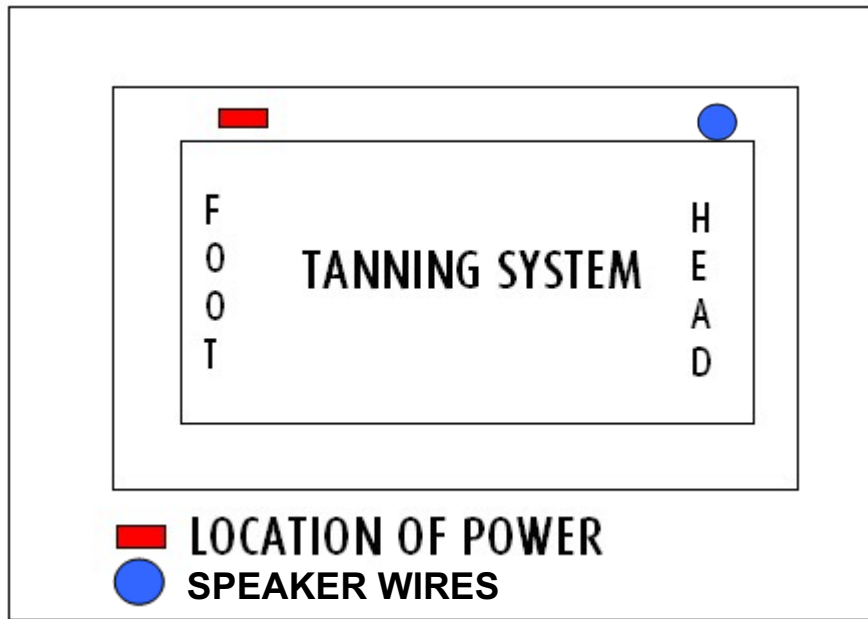

ACTUAL DIMENSIONS

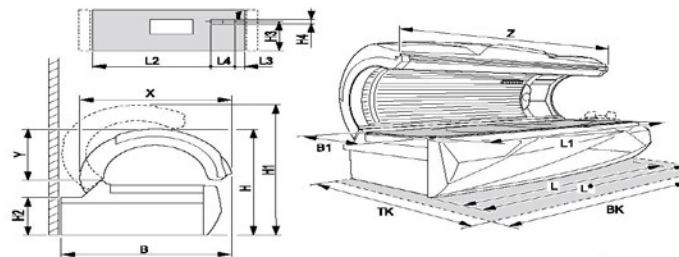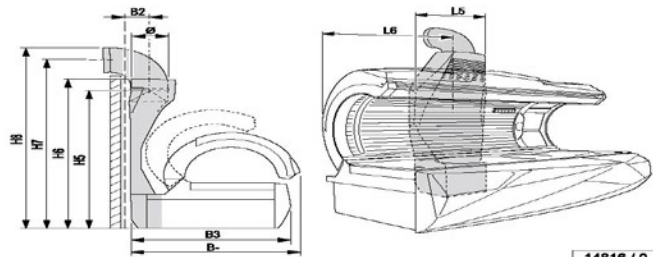

B =	56 13/16 in	1,443 mm	H =	52 1/16 in	1,322 mm
B - =	60 4/16 in	1,530 mm	H1 =	66 11/16 in	1,694 mm
B1 =	32 11/16 in	830 mm	H2 =	17 2/16 in	435 mm
B2 =	6 9/16 in	167 mm	H3 =	13 12/16 in	350 mm
B3 =	59 13/16 in	1520 mm	H4 =	2 3/16 in	55 mm
L =	89 6/16 in	2,270 mm	H5 =	2 3/16 in	1,874 mm
L* =	93 5/16 in	2,370 mm	H6 =	76 12/16 in	1,950 mm
L 1 =	88 9/16 in	2,250 mm	H7 =	85 15/16 in	2,183 mm
L 2 =	65 12/16 in	1,670 mm	H8 =	91 14/16 in	2,333 mm
L3 =	1 12/16 in	45 mm	∅ =	11 13/16 in	300 mm
L 4 =	9 10/16 in	245 mm	BK =	94 1/2 in	2,400 mm
L5 =	25 9/16 in	650 mm	TK =	82 11/16 in	2,100 mm
L6 =	39 13/16 in	1,012 mm	X =	82 11/16 in	1,277 mm
			Y =	28 1/16 in	712 mm
			Z =	88 3/16 in	2,240 mm