

JK Products & Services, Inc

ERGOLINE SUNRISE 7200 Hybrid Light




Power consumption rating	10,600 W
Rated frequency	60 Hz
Rated voltage	230 V
Rated breakers	40 amp 3-pole or 70 amp 2-pole
Rated amp draw 3 Ø	28
Rated amp draw 1 Ø	48
Mains Power Connection*	The unit is configured from the factory for connection to 3-Phase power. A 3/4" liquid-tight connector is provided See note for wiring
Noise level 1m away from device	<71.6 dB
Noise level inside the device	<70 dB
Load on the acrylic panel	max. 330 lb
Weight	approx. 1202 lb
Operating temperature	59-89.6 °F
Unit footprint**	94 1/2" X 88 17/64"
Minimum Room Size	7' X 7'
Number of body lamps	48 @ 200W 2M

*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.


**Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

JK Products & Services, Inc

Actual Dimensions

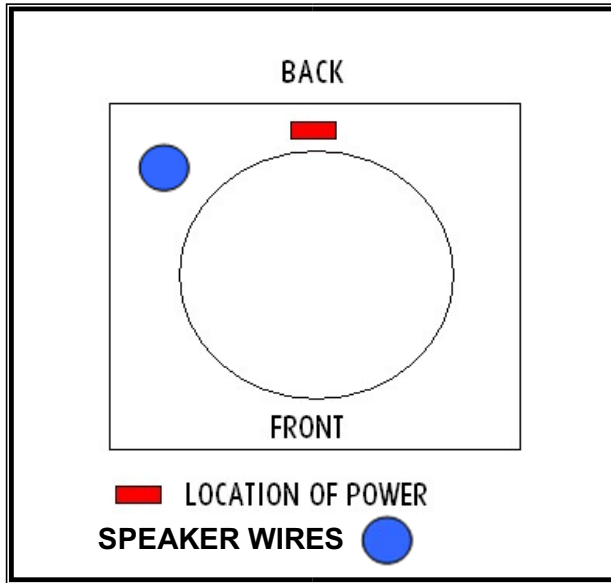

BK =	88 17/64 in	2,242 mm
BK1 =	19 11/16 in	500 mm
BK2 =	19 11/16 in	500 mm
TK =	94 1/2 in	2,400 mm
TK1 =	24 27/32 in	631 mm
TK2 =	11 13/16	300 mm
B =	48 7/8 in	1,242 mm
B6 =	30 5/16 in	770 mm
B1 =	24 3/16 in	615 mm
B4 =	24 3/16 in	615 mm
B8 =	62 3/16 in	1,579 mm
T =	56 3/4 in	1,442 mm
T1 =	57 13/16 in	1,469 mm
T3 =	30 5/16 in	770 mm
H =	90 7/8 in	2,308 mm
H1 =	3/8 in	10 mm
H2 =	94 1/2 in	2,400 mm

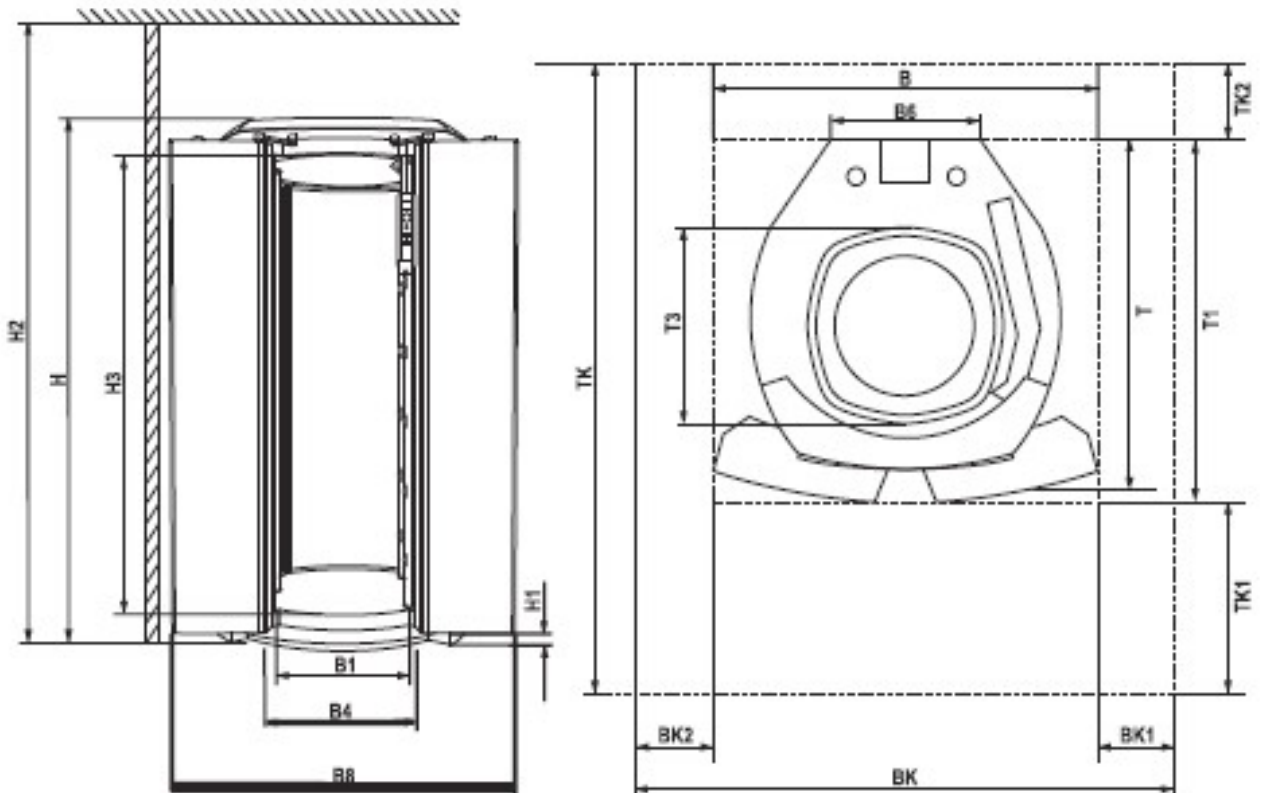

Ergoline Sunrise 7200 Hybrid Light

Revision Date

3/14/2019