

# JK Products & Services, Inc

## PLANET FITNESS 48/4




Power consumption rating	16,700 W
Rated frequency	60 Hz
Rated voltage	230 V
Rated breakers	60 amp 3-pole or 100 amp 2-pole
Rated amp draw 3 ∅	45
Rated amp draw 1 ∅	76
Mains Power Connection*	The unit is configured from the factory for connection to 3-Phase power. A 1" liquid-tight connector is provided <b>See note for wiring</b>
Noise level 1m away from device	62.9 dB
Noise level inside the device	<70dB
Load on the acrylic panel	max. 330 lb
Weight	approx. 1,378 lb
Operating temperature	59-89 °F
Unit footprint**	94 1/2" X 90 9/16"
Minimum Room Size	9' X 8'
Number of body lamps	Base 22 @ 200W 71"
	Canopy 26 @ 200W 71"
Number of facial lamps	4 @ 5200W
Shoulder tanner lamps	2 @ 250W


\*Owner is responsible for all wiring up to the terminal block connection inside the device. As well as ensuring the wire is properly sized for the amp draw and breaker selection per the electrical code in their area.

\*\* Minimum footprint size for proper operation and cooling of the unit. Does not account for door sizes or obstructions in the room. (Footprint measurement is not the room size)

# JK Products & Services, Inc

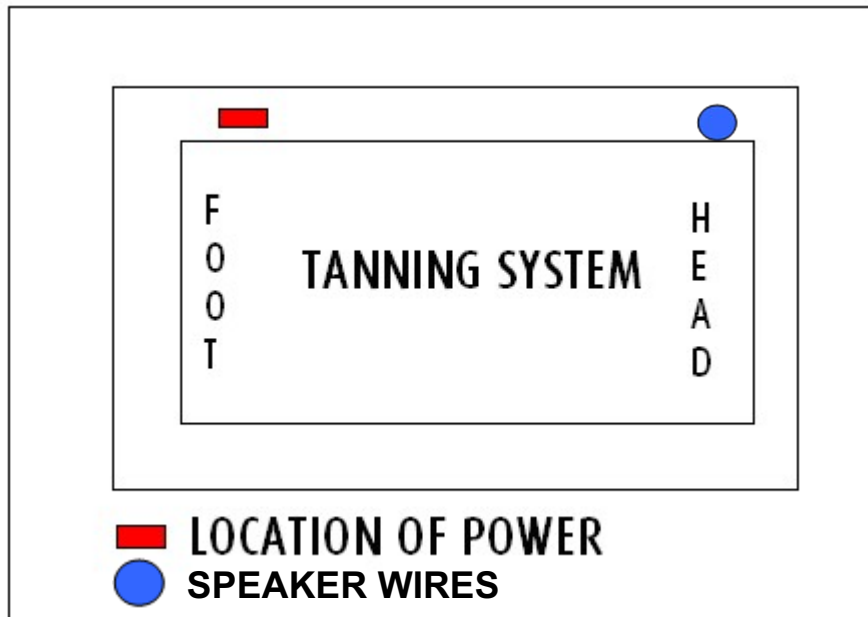

## ACTUAL DIMENSIONS

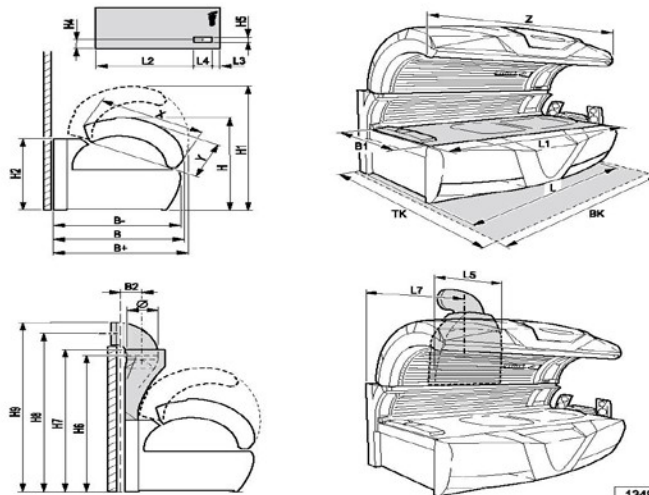

13495 / 0

B + =	60 7/16 in	1,535 mm	H =	53 12/16 in	1,365 mm
B =	59 1/16 in	1,500 mm	H1 =	75 in	1,905 mm
B - =	55 11/16 in	1,415 mm	H2 =	43 9/16 in	1,106 mm
B1 =	33 1/16 in	840 mm	H4 =	17 11/16 in	450 mm
B2 =	8 1/16 in	205 mm	H5 =	2 3/16 in	56 mm
L =	91 14/16 in	2,334 mm	H6 =	74 in	1,879 mm
L1 =	86 10/16 in	2,200 mm	H7 =	78 13/16 in	2,002 mm
L2 =	69 6/16 in	1,762 mm	H8 =	87 3/16 in	2,215 mm
L3 =	9 4/16 in	235 mm	H9 =	92 15/16 in	2,360 mm
L4 =	9 9/16 in	243 mm	Ø =	11 13/16 in	300 mm
L5 =	34 2/16 in	867 mm	BK =	94 8/16 in	2,400 mm
L7 =	44 2/16 in	1,120 mm	TK =	90 9/16 in	2,300 mm
X =	50 13/16 in	1,290 mm			
Y =	19 11/16 in	500 mm			
Z =	88 1/16 in	2,236 mm			

